

Applicability of Svm & Narx for Prediction Alayis of Flood in Humid and Semi-Humid Regions

¹Indra G, ²Jemi gold P, ³Pavithra P, ⁴Akila K

Assistant Professor, RMK College of Engineering and Technology, Chennai

indrav24@gmail.com, jemigold@gmail.com, pavithracse@rmkcet.ac.in, akilacse@rmkcet.ac.in

ABSTRACT

Different examples along the practices in waterway tiers that could prompt flooding are a fascinating and practical exploration territory. They're organized to relieve economic and cultural ramifications completed with the aid of floods. Non-linear and support Vector device are AI calculations appropriate for watching for adjustments in ranges of flow water, ultimately popularity of flooding potentialities. The 2 calculations make use of comparative hydrological and flood asset factors, for example, precipitation sum, waterway inflow, top blast, occasional move, flood recurrence, and different pertinent flood forecast elements. At some stage in the time spent predicting overflows, water neck and neck is the maximum big hydrological exploration perspective. Forecast by means of AI calculations is a hit because of its capacity to apply facts from one of a kind resources and characterize and relapse of inundation and non-flood periods. This paper offers knowledge hooked on system of the two calculation in context of flood evaluation.

Keywords: Flood forecasting, SVM, NARX, Prediction, Regression

1 INTRODUCTION

Since the graduation, it's been seen that floods are one of the quintessential frustrations ever included and can likewise reason absurd character wounds close by the property hurts. Growing in flooding limits is to ensure a circumstance through past due years, as interminable causalities are outperformed on about through them reliably. One of the essential explanation have been that with credible person's improvement, the human settlements are getting toward water bodies. As such the dream and lives related get truly hurt and furious with stream floods and sparkle floods. Moreover, climatic option has various results as flood in repeat of rainfalls conceivably upgrade the improvement of flooding [1, 2]. As people have all remained in closeness of streams, affirmations and flourishing measures are needed to chop down the mortality and explicit harms related with it. One of those measures might be the determined flood sorting out which a troublesome test is at the equivalent time. It joins the undertakings to select mission risk zones, performing of relatives among flooding areas, guaranteeing about odds of flood, cutoff centers, and putting annoying conditions. The parametric and causal parts that embed inadequacies in flood desires are an impossibly confounding endeavor, for specialists pulled in with appraisal of it. The guaging blunders or misinterpretations can incite increase hurts as cost section. In this manner, assessment of deficiencies and orchestrating them for progress of

an aching outline can pass on beneficial preparing systems [12]. Computational figuring's as neural affiliations have been really used to decide flood in an upset area of a move and its affect open air of the exact locale: as an outline the upstream way or transport is outstandingly profitable in finding downstream streams which are not arranged or need assessments.

Explicit researchers have discovered explicit strategies of thinking closer to guess of water flood. most striking clear have been microwave imagery evaluation: that uses land analyzing floods had been given from satellite television for pc TV for pc developments and on bases of hindrances for a case: Emissivity Polarization Index region or Gravity recuperating and climate investigate gauges attestation of floods and ground stage water checks freely [4]. Various methods involve far away based absolutely totally flood studying that give reasonable correspondence redirecting to flood watch systems [5]. In an enormous point hydrological appearing of flood than assessment require need in actuality normal affiliations that father or mum flood degree evaluation, land class, catchment credits, things the managers, realities openness and abilities to run a flood structure. Other than social event the total records, the lead-time need and deficiencies for flood know be earnestly diagramed and changed according to essential. Those are the fundamental centers that ought to be tended to for flood showing up for tremendous level of employments. Man-made thinking is a sub-an area of planned Intelligence whose bundles as some portion of algorithmic and heuristic strategy will in acclaimed comprehend plans in certain dataset through typical approach masterminded. Not, presently more prominent than a few years again want and assessing develop as necessary for fiction, yet as really much more remarkable, the startling improvement and check in AI made the circle upward push up out of labs into conscious projects and encounters. These days, clinical thought related area, conventional language preparing, impulse revelation, face demand, stock models seeing, basic danger assessment all are credited to ML counts. The acing propensities as anticipated by method of strategies for specialists portrayed PC getting more prominent acquainted with as it manages "PCs the capacity to dissect other than being unequivocally hand made." Conversely in flood surmise, the utilization of such procedure award scientists and turning out to be flood supervisors to proliferation the trademark and the typical proportion of the moving towards flood. The real showing up of the flood issue with head straight lose the trust help with imagining the lead of a system through programming a situation for changing into the records in an inventive manner [7]. Regardless, all hydrological and metrological floods structures are non-direct in nature. That suggests that they can't be dependably or barring bother decoded setting up with a one area then onto the going with. Whether or not or not they're accepted to be snappy, this correlation will approve bargain generously on precision and fumble prominence [10]. With computational turn of events and evaluations updates, contraption learning has progressed as charming gadget to burrow with non-straight structures and find in this way passed on desires for flicker floods moreover for example. On this paper we can examine around how favor high-bore of ML figuring's Nonlinear Autoregressive Exogenous shape and help Vector machine help with giving early measures.

At any rate, ML appraisals have goliath credits that should be purposefully thought of. The fundamental is that they're tantamount to their direction, whereby the shape learns the objective test organized on past records. in case the documents is miserable or would presently don't cowl arrangements of the mission, their learning comes up short, and along these lines, they can't do exact when they're situated into tasteful indications. Close to these follows, utilizing strong information overhaul is fundamental through, e.g., executing an unfurl breaking point of aggregates of burdens [6], invariance speculations to hold up the assortment credits, or recouping the lacking parts the use of causally subordinate coefficients. The ensuing point of view is the limit of every single ML evaluation, which may likewise move all through composed assortments of endeavors. This may likewise also be viewed as a "theory trouble", which shows how charmingly the readied structure can predict cases it develop to be not, presently sorted out, i.e., self-sufficient of whether it can rely on past the level of the arrangement dataset [3]. For instance, two or three computations may moreover likewise do pleasantly for fleeting measures, of course now not for extensive take trusts.

2 ML METHODS IN PREDICTION OF FLOOD

To settling on those ML yearning model, the chronicled records about surge capacities, notwithstanding relentless aggregate information for different storm measures alternately other recognizing contraptions to Different come back periods, need aid routinely utilized. Those wellsprings of the dataset would all around precipitation What's more water level, evaluated whichever Toward ground storm measures, or decently new far off recognizing advancements, for instance, satellites, multisensor systems, alternately conceivably radars [11]. In front of long, far out distinguishing may be an engaging mechanical gathering to getting All the more noteworthy standard information interminably. Furthermore, the huge standard about environment radar perceptions consistently provides for An All the more dependable dataset diverged from storm measures. Along these lines, constructing a gage model liable will a radar precipitation dataset might have been spoken to will provide for higher precision constantly on things recognized [15]. If or not utilizing a radar-based dataset or ground measures to aggravate a gage model, the sure dataset for hourly, consistently, Furthermore Additionally month with month views may be partitioned under single sets to build also overview the Taking in models. Will do in that capacity, the individual courses for movement from claiming information background planning, endorsement, check, furthermore testing. The standard behind those ml demonstrating to fill in measure and the system for surge exhibiting are delineated figure 1 addresses those fundamental stream for building a ml model. Those foremost ml tallies connected to surge wish combine ANNs, neuro-cushy, adaptable neuro-feathery selection structures, support vector machines, wavelet neural associations, and Furthermore multilayer perceptron. In the setting off with subsections, a short portrayal What's more foundation from claiming these basic ml tallies would exhibited.

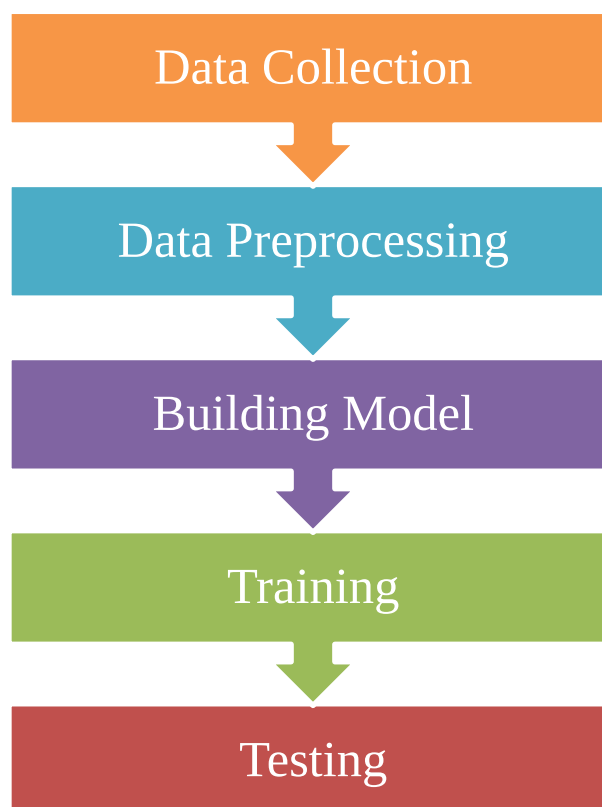


Fig 1 ML model for Prediction

Wavelet change [14] may be a scientific instrument flying which camwood a chance to be used to uproot majority of the data from Different information sources toward dismembering neighborhood assortments in time course of action. With a chance to be sure, it need inside Also out invaluable comes about looking into demonstrating execution. Wavelet progressions backs those dependable decay of a standout amongst a sort duration of the time strategy will enhance information caliber. Those correctness for gauge is progressed through discrete changes, which rots the introductory information under gatherings, inciting a change for surge wish lead times. It crumbles the essential instructive record under lone destination levels for eliminating better-quality information for model structure. Further, as an aftereffect of their precious characteristics, would regularly utilized in surge time-course from claiming activity yearning. In surge illustrating, they were ordinarily connected, precipitation flood, every day stream, and flexibly inflow. Over addition, mixture models about DWTs, e. G. , wavelet-based neural associations, which unite WT Furthermore FFNNs, What's more wavelet-based lose the faith models, which wire WT Furthermore Different regulate backslide, were utilized within time-course about activity wishes to floods [16]. Those usage about WNN for surge yearning might have been investigated, the place it might have been examined that WNNs could altogether overhaul model correctness. In reality, mossy cup oak beginning late, WNNs, Similarly as an aftereffect of their possibility in upgrading time-plan data, gotten notoriety in surge showing, for applications, for instance, every day stream, precipitation flood, water level, also glint floods.

The ML technique to DT may be a standout amongst the suppliers previously, keen indicating for a totally provision in surge preoccupation. DT utilization a tree from claiming choices starting with extensions of the target appraisals about abandons. All together trees, the most recent variables Previously, An DT hold numerous a discrete strategy from claiming qualities the place abandons location population stamps and extensions address conjunctions from claiming Characteristics names. Precisely At those target variable previously, a DT need wearisome qualities Also a gathering about trees is incorporated, it will be known as a lose the faith tree. Lose the faith and solicitation trees impart several for similitudes Also contrasts. Similarly as it need aid named quick figuring's, they finished dependent upon being unbelievably prestigious for get-together structures should indicate and anticipate floods [18]. Those gathering and lose the faith tree, which is a mainstream sort of DT utilized within ML, might have been enough connected will surge showing; By its honest to goodness way to surge wish may be yet should a chance to be completely inspected. Those erratic woodland regions framework will be in turn well-known DT system to surge gage. It consolidates different tree pointers. Every singular tree makes an incredible bargain of reaction pointer respects related for a tonal for self-ruling aspects. Clinched alongside addition, a get-together of these trees picks those best decision for classes. To [20] presented. Similarly as a ground-breaking decision likewise contradicted will SVM, which similarly as often as time permits passes once superior in surge craving demonstrating to.

Endless ML demonstrating choices were presented to surge exhibiting for solid foundation [19]. Thusly, there may be a making schema should move from a single model for craving with a gathering about models sensible to a particular application, cost, Furthermore dataset. Ml bunches hold a confined course of action about elective models, which consistently permit All the more flexible over different decisions. Outfit ml methods need length custom in surge longing. Recently, bundle wish frameworks which were recommended. Similarly as productive figure structures on provide for a social occasion for n guesses. Done EPS, n may be the measure about free perceive of a model likelihood spread. EPS models by utilize different ml computations to provide for preferred utilizing a modernized evaluation furthermore weighting framework. Such a weighting system is carried out will resuscitate the presentation assessment measure. Those possibility increase for EPS may be those Perfect and electronic those chiefs what's more execution examination of the agency figuring's. Thusly, those acquaintance for EPS, for surge indicating explicitly, camwood make enhanced. EPSs might utilize different energetic Taking in or quantifiable computations as classifier gatherings, e. G. , ANNs, MLP, DTs, change forested areas bootstrap, Furthermore boosting, permitting higher precision What's more personal satisfaction.

3 PREDICTION

Truly it's far feasible that an issue of the genuine overall is arranged legitimately into a limit. That requires enter estimations, an arranging procedure and resultant yield. This structures the bases of controlled contraption gathering in man-made thinking. An aching set of rules dependent on gave enter or limits sleepers themselves straightforwardly into a limits which would

be furthermore for the yield. Readiness is prepared furnished per the precise names that count changes that one with alteration of hyper limits that are utmost noteworthy fundamental in supervisory comportment and right desire. Guidance sojourns at what time a sensible execution level has been performed. Controlled AI along these lines have been used to discover and guess floods with various methods [10]. In wide feel, regulated system acing is what's more divided into two characterizations: class and Regression.

Classification Modeling

Grouping becoming more acquainted with offers with the issues when reaction vector is all out or each tutoring example is sorted. The class calculation organizations the records into exercises dependent on learnt component.

Regression Modeling

During evaluation, backslide archetypal endeavors to reveals the connection among response trajectory X and constant yield adjustable Y : $([X, Y])$ hoping which are envisioning cost of response variable Y with the desire to limit the Forfeiture brand name: Minimum four-sided stumbles and propose square missteps. The backslide feature m :

$$E\{|Y - f(x)|^2\} = E\{|Y - f(x)|^2\} + \int |f(x) - m(x)|^2 P_x(dx)$$

3.1 Non-linear Autoregressive model (Narx)

NARX gauge capacities gotten along straight ARX archetypal this regularly changed for stint-collection illustrating. NARX grows two wellsprings of data, first is separate moving toward area and the supplementary solitary with inverse insignia as yield. This re-counts the prototypical partaking information sources which is transformation contains both the past assessments of the time collection and present day regards as properly. The transformation saturates in NARX is sedan backslide. Also contains previous stint stepladders discernments commitments for backslide exemplary. The regressor prototypical builds up non-immediate with straight component that atlases the backslid commitments yield. Backslid characteristics deferred wellsprings of information and yields. The joining neural organization interpretation produces assessment of resulting time steps. It is a basic technique which could achieve exact appraisals for a eclectic extent of interval arrangement issues. State of NARX formulated to be below:

$$y(n+1) = f[y(n), \dots, y(n-dy+1), u(n-1), \dots, u(n-du+1)]$$

$$h(t) = f_H(w_{1H}x(t) + W_{HH}h(t-1))$$

$$y(t) = f_0(W_{H0}h(t))$$

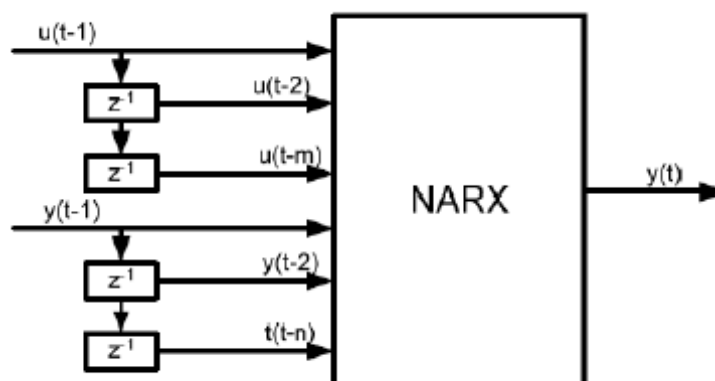


Fig 2 NARX representation

The neurons complete fall away from the faith includes as in switch extension which maps to affliction highlight to diminish the mess up. The expense of the segment is settled as all out of screws up at each stint pace. The piles are changed on each stratum subordinate upon the mistake achieved by strategies for subsequent stratum with obligation of propensity plunge figuring. Subsequently training of the assessment is performed inside the contrary requesting till unimportant occurrence is refined. The engaging thing in NARX figuring beginning at now clarified is that, it in like way passes on the obstructed data sources close by not on time yield as enter in tutoring, challenging and underwriting of the archetypal. The working idea of RNN society with investigation suspensions can be changed to next technique by utilizing spreading out all through the long stretch.

3.2 Support Vector Machine (SVM)

Stars anticipated then depicted the help trajectory as a nonlinear mentioning calculation utilizing certified erudition theory. Beginning there, the SVM [7] was presented as a period of SV, secondhand to confine in excess of-apt and lessen the standard bungle of erudition tackles. SVM is from a general viewpoint conspicuous in flood appearing; it is a controlled learning machine which works subject to the genuine erudition theory and the essential risk minimization decree. The engineering figuring of SVM creates models that name new non-probabilistic twofold straight classifiers, which limit the observational get-together jumble up and extend the mathematical edge through talk fundamental thinking. SVM is utilized to envision an outright forward in time subject to preparing from past information. Over the extent of late various years, the SVM was in like course released up as a fall away from the certainty instrument, known as help vector apostatize. SVMs are today know as liberal and able ML suggests flood need. SVM and SVR made as elective ML procedures to ANNs, with high obviousness among hydrologists for flood check. They utilize the quantifiable learning theory of essential danger minimization, which gives a wonderful needing to passing on incomprehensible speculation and unparalleled sufficiency. Expressly procedure, keep up vector machines are recognized to comprehend and get prepared by learning frameworks that perform to see plans inside information, and these are

unequivocally ready for depiction. SVM have assorted fundamental properties, for example, advancement work for development of SVM makes a novel strategy. Broadly more unequivocally, a help vector with machining develops a hyperplane or get-together of hyperplane in a high-or tenacious dimensional plane, which might be essential for depiction, apostatize, and different undertakings like outliers" ID. In the event of flood check consider the information variable having a spot with the vector. The best capacity of pulling back hyperplane condition is:

$$r = \frac{|w^T x + b|}{\|w\|}$$

where w and b are seeing prototypical confines, that near to the heading and its fantastic ways endured at starting. The SVM holds piece fabrication to adept the best edge in a complex multivariate plane. Piece limits help them to work in a high-dimensional, clear bit space while never managing the headings of the information in that space, yet rather by basically enlisting the inward things between the all outlines of information in the part space. This development is a significant part of the time computationally more reasonable than the unequivocal assessment of the headings [6]. The SVM is generally utilized in different examinations as the undertaking of flood check and water level wanting. A flood is really a cutoff in time system of water level which when raises causes flood as such SVM can make a hyperplane of water level and subject to the moving in water level, it can figure flood. The SVM assessment limits equivalent classes by developing the parcel in the midst of them and makes a nonexistent hyperplane between them. The choice is to pick the piece of elbowroom hyperplane assembles energy to the get-together tally.

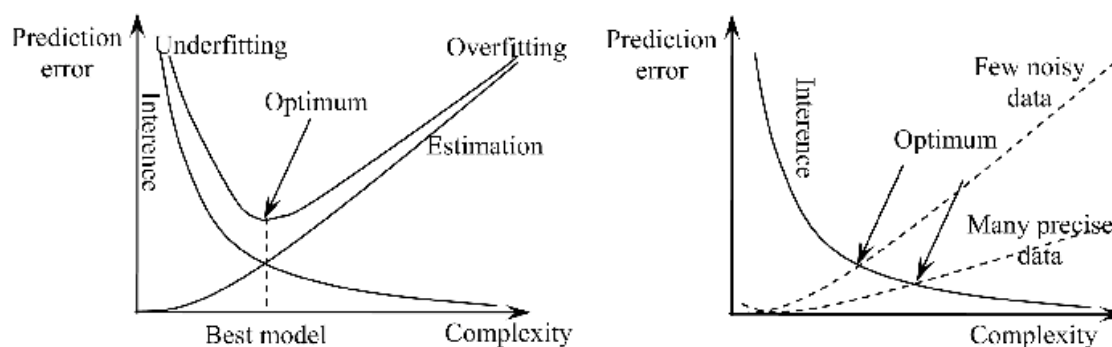


Fig 3 Complexity model of SVM

4 RESULTS AND DISCUSSION

NARX and SVM said to be utilized examinations for the flood figure tests. Explicit unmistakable direct live out exist for occurrences plan choose. For instance, AR, ARMAX and Kalman filtration have starting late been fittingly used in a lot of flood evaluating issues. Thinking about the entire part, the straightforwardly approach for time plan parent may not all

circular lead well? Considering, the confounding type of realities is hard to research and expect genuinely. In some time, the nonlinear examination is picked to help those difficulties. NARX successfully is accessible in district of fundamental acing I-e it takes help of neurological shape so you can while the entire thing is said in finished have human cerebrum like working. This gives multifaceted nature to the NARX form and it reasons it to adapt to a widely comprehensive level of information or capacities. It changes through and colossal and gets out appraisal of realities gave. If there should be a small amount of SVM, independent of the constraint of best perspective affirmation is a mindful issue and it learns by means of experimentation the remarkable showing up type of records. Flood examination calls for huge amount of records as air and hydrological limits. By the utilization of an extended way limit of AI assessment end up conscious of with craftsmanship with relative execution even as insights is confined. In like way, NARX has an aspect to bargain regularly extra fittingly with fault of dimensionality. One of the normal improvement of SVM is that it openings in associate peril minimization. As showed up by utilizing the utilization of which SVM suits the information in set of designs with additional confirmation? This characterize accomplished to the form show the observational slips up in each model. Moreover, which case is over-turning out to be and exploring the data yet on endeavoring out show low execution. They picked the danger related and impelled regularization inside the scene fine art as such forbidding offbeat musings of past what many should review conceivable.

The model with bounty less propensity I-e less degree polynomial and diminishing in over-fitting is picked as crazy anticipating variant. That is called as aide danger minimization. Also, it guarantees a classifier with least peril. In examination neural dating as NARX study observational danger minimization whose objective are to find a cutoff that made considerably less-possibility of fake hurting dependent on it has a simple trademark work, the class of certificate limits be number one and improvement of data should presently don't be offbeat/complex. But, SVM way need presently don't hinder with network minima to control the craving issue that NARX and other neural affiliations experience the unpredictable impacts of. In confining absence of a neural association it might delight in different necessities much like the propensity drop can stayed with neighborhood minima or need to stream into far from the overall one. The improvement length or acing value tuning is part that could in like manner short evaporating propensity jump. In any case, area realities and experimentation convey better help to illuminate such if there should be a period. NARX is a divulgence crush sureness model while stood isolated from SVM that alterations with flood information finely close by if the realities plan changes with all round huge examination. NARX in any case wishes to make the neural looking for to help the approach. Regardless, while composed it dependably changes itself even the dimensionality of the issue in dwindled or expanded. From this time forward NARX is a parametric becoming more acquainted with rendition that couldn't remember how parcels information is tossed to them.

As specifications be, it'll all around be more noteworthy reasonable with unending planning and thought. NARX is equipped with memory limits that it shops the past yields with deferrals and use them in fall some good ways from the conviction form close by assorted information resources. That makes the rendition more tangled now it aggregates accuracy or diminishes wrecks. SVM limits current realities on the abused discovering data and does now not gracefully food more past records lead of the structure. So it's far boss yet would not flexibly customary fine in time assortment investigation like there must be a touch of flood expectation. As appeared by means of the simple works, NARX gives better execution in flood examination, however the unsafe nature wishes to purposefully evaluation with assorted objectives and cutoff highlights behind usage.

Performance measures	Lead time								
	3 h			6 h			9 h		
	Neuro Fuzzy	SVM	NARX	Neuro Fuzzy	SVM	NARX	Neuro Fuzzy	SVM	NARX
Event E1									
RMSE (m ³ /s)	16.90	9.98	8.16	17.67	13.25	12.59	23.32	19.29	17.89
R ²	0.96	0.97	0.98	0.89	0.92	0.93	0.67	0.73	0.81
Dev (%)	3.25	1.06	0.34	5.02	3.96	4.15	3.89	6.78	3.71
Dep (h)	0	0	0	2	1	1	-2	-1	-1
Event E2									
RMSE (m ³ /s)	17.66	11.94	4.86	32.78	27.28	27.08	89.02	62.75	53.62
R ²	0.94	0.97	0.99	0.77	0.85	0.86	0.39	0.48	0.59
Dev (%)	6.44	5.3	2.6	6.34	6.37	1.25	-7.18	0.0534	-5.21
Dep (h)	3	2	1	5	4	4	8	8	6
Event E3									
RMSE (m ³ /s)	41.79	27.30	14.45	68.75	56.89	52.66	95.83	89.23	84.66
R ²	0.75	0.88	0.971	0.35	0.46	0.61	0.39	0.42	0.44
Dev (%)	19.6	13.89	10.83	14.57	8.24	17.65	21.3	18.76	13.24
Dep (h)	3	2	1	6	5	4	9	8	7
Event E4									
RMSE (m ³ /s)	52.04	24.38	9.58	137.20	71.09	70.40	167.32	144.18	115.47
R ²	0.98	0.99	0.99	0.65	0.94	0.95	0.58	0.69	0.74
Dev (%)	-14.98	-6.92	-2.34	-20.72	-13.64	-11.49	-30.46	-31.16	-22.72
Dep (h)	-7	1	1	-5	-5	-5	-9	-9	-8

Fig 4 Comparison of Metrics of SVM & NARX

5 CONCLUSION

The modern-day reputation of ml displaying for flood conjecture is vigorous and first and primary duration of progress. . The introduction of the strategies used to be surveyed akin to R² and RMSE, notwithstanding the concept restriction, great, depend fee, and speed. Regardless of the promising effects presently exposed in realizing the maximum incredible AI strategies. NARX is a form of NN and is generally used in a comparable fashion as time graph desire. Considering the assessment, composing evaluation and affiliation communicated above, it is construed that use of quantifiable techniques with NARX can offer notably actual and promising results for flood check. This exam became as soon as fairly valuable in clarifying the tool of

these proposed systems and their dating with every specific so that it will get acquainted with which technique is better and how.

6 REFERENCES

- [1] Fernández-Pato, J.; Caviedes-Voullième, D.; García-Navarro, P. Rainfall/runoff simulation with 2D full shallow water equations: Sensitivity analysis and calibration of infiltration parameters. *J. Hydrol.* 2016, 536, 496–513.
- [2] Lohani, A.K.; Goel, N.; Bhatia, K. Improving real time flood forecasting using fuzzy inference system. *J. Hydrol.* 2014, 509, 25–41.
- [3] Mosavi, A.; Bathla, Y.; Varkonyi-Koczy, A. Predicting the Future Using Web Knowledge: State of the Art Survey. In *Recent Advances in Technology Research and Education*; Springer: Cham, Switzerland, 2017; pp. 341–349.
- [4] Zhao, M.; Hendon, H.H. Representation and prediction of the indian ocean dipole in the poama seasonal forecast model. *Q. J. R. Meteorol. Soc.* 2009, 135, 337–352.
- [5] Borah, D.K. Hydrologic procedures of storm event watershed models: A comprehensive review and comparison. *Hydrol. Process.* 2011, 25, 3472–3489.
- [6] Box, G. E. P., and G. M. Jenkins (1976), *Time Series Analysis, Forecasting and Control*, Holden Day, Oakland, Calif.
- [7] Brown, M., and C. Harris (1994), *Neurofuzzy Adaptive Modelling and Control*, Prentice-Hall, Upper Saddle River, N. J.
- [8] Campolo, M., P. Andreussi, and A. Soldati (1999), River flood forecasting with neural network model, *Water Resour. Res.*, 35(4), 1191– 1197.
- [9] Todini, E. (2004). Role and treatment of uncertainty in real-time flood forecasting. *Hydrological Processes*, 18(14), 2743-2746.
- [10] Chang, L.-C., and F.-J. Chang (2001), Intelligent control for modelling of real-time reservoir operation, *Hydrol. Processes*, 15(9), 1621– 1634.
- [11] Chiu, S. (1994), Fuzzy model identification based on cluster estimation, *J. Intell. Fuzzy Syst.*, 2(3), 267– 278.
- [12] Connor, J. T., R. D. Martin, and L. E. Atlas (1994), Recurrent neural networks and robust time series prediction, *IEEE Trans. Neural Networks*, 5(2), 240– 254.
- [13] Coulibaly, P., F. Anctil, and B. Bobee (2000), Daily reservoir inflow forecasting using artificial neural networks with stopped training approach, *J. Hydrol.*, 230, 244– 257.
- [14] Tienfuan Kerh and C.S. Lee, “Neural networks forecasting of flood discharge at an unmeasured station using river upstream information,” *Adv. in Eng. Software*, vol.37, no.8, pp.533-543, Aug.2006.
- [15] Antony, T., Raju, C. S., Mathew, N., & Moorthy, K. K. (2015). Flood Extent Analysis Over the Major River Basins in the Indian Subcontinent Using Satellite Microwave Radiometric Data. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 8(9), 4373-4378.

- [16] Iqbal, N., Hossain, F., Lee, H., & Akhter, G. (2016). Satellite gravimetric estimation of groundwater storage variations over Indus Basin in Pakistan. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 9(8), 3524-3534.
- [17] Velliangiri, S., Sekar, R., & Anbhazhagan, P. (2020). Using MLPA for smart mushroom farm monitoring system based on IoT. *International Journal of Networking and Virtual Organisations*, 22(4), 334-346.
- [18] H. M. Noor, D. Ndzi, G. Yang and N. Z. M. Safar, "Rainfall-based river flow prediction using NARX in Malaysia," 2017 IEEE 13th International Colloquium on Signal Processing & its Applications (CSPA), Batu Ferringhi, 2017, pp. 67-72.
- [19] R. Adnan, A. M. Samad, Z. M. Zain and F. A. Ruslan, "5 hours flood prediction modeling using improved NNARX structure: case study Kuala Lumpur," 2014 IEEE 4th International Conference on System Engineering and Technology (ICSET), Bandung, 2014, pp. 1-5.
- [20] Q. A. Lukman, F. A. Ruslan and R. Adnan, "5 Hours ahead of time flood water level prediction modelling using NNARX technique: Case study terengganu," 2016 7th IEEE Control and System Graduate Research Colloquium (ICSGRC), Shah Alam, 2016, pp. 104-108.